Brochure

Studio
Container House

From: SustainArch Development
Address: 2683 Via De La Valle, Ste G233, Del Mar, CA
WB: www.SustainArchDevelopment.com
Phone : (858) 222-1270

1. Specification of steel Container house.

This house is designed for a family holiday . It can provide accommodation for a couple and two children.

Length 24ft X width 8 ft X height 9 ft.

Layout as below:

Fold the King bed, put down the dining table as below.

Fold the dining table , put the bed down as below .

More interior views.

Kitchen

Dining room , shower room and washing machine.

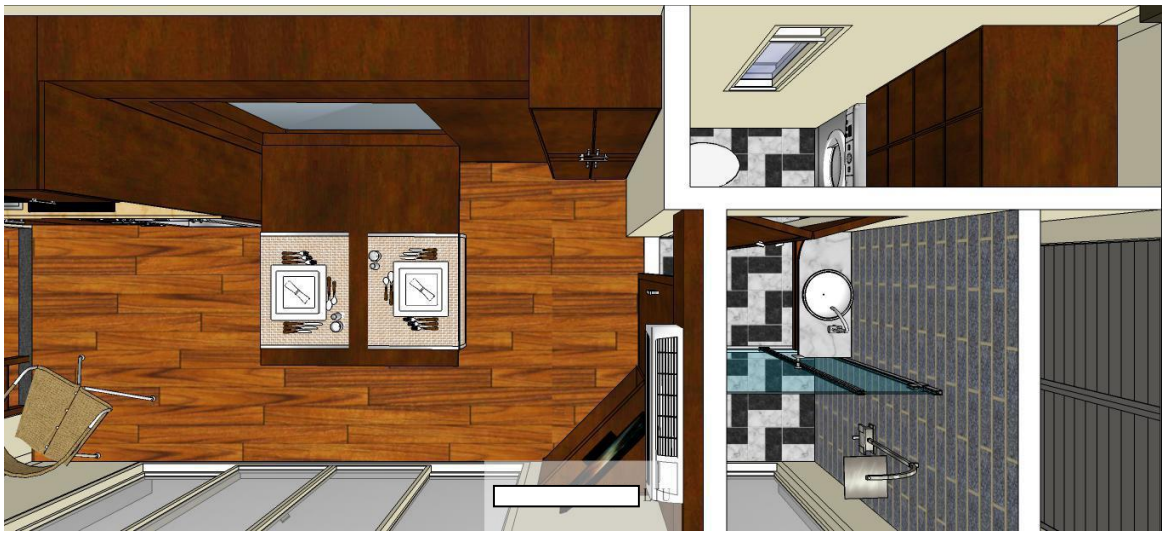

Looking from outside.

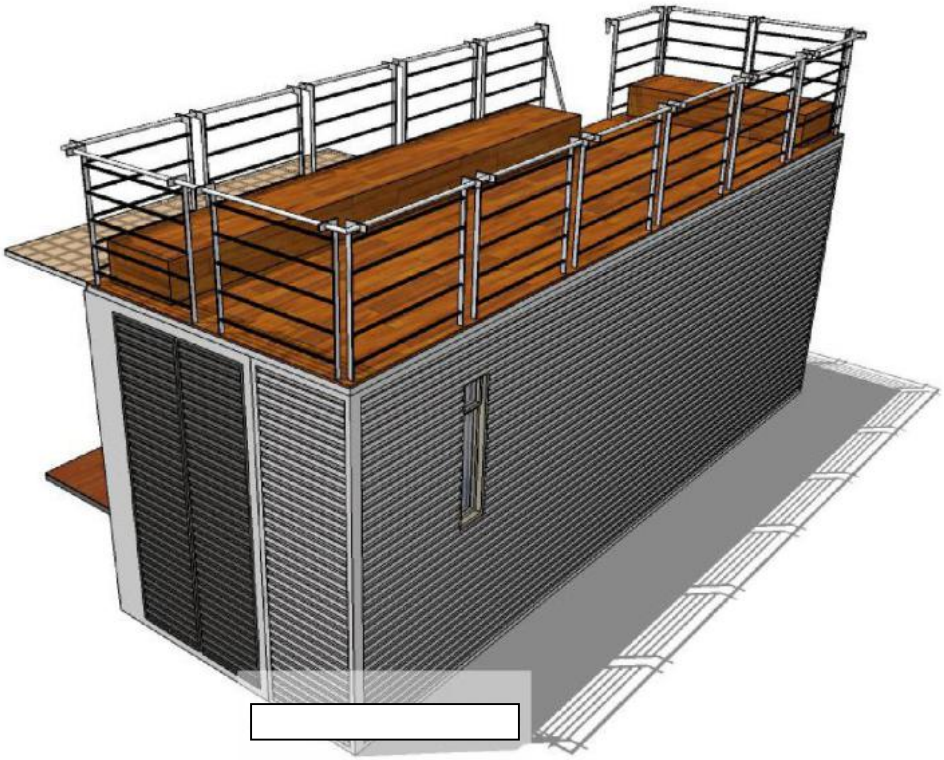

Top view. (Two benches)

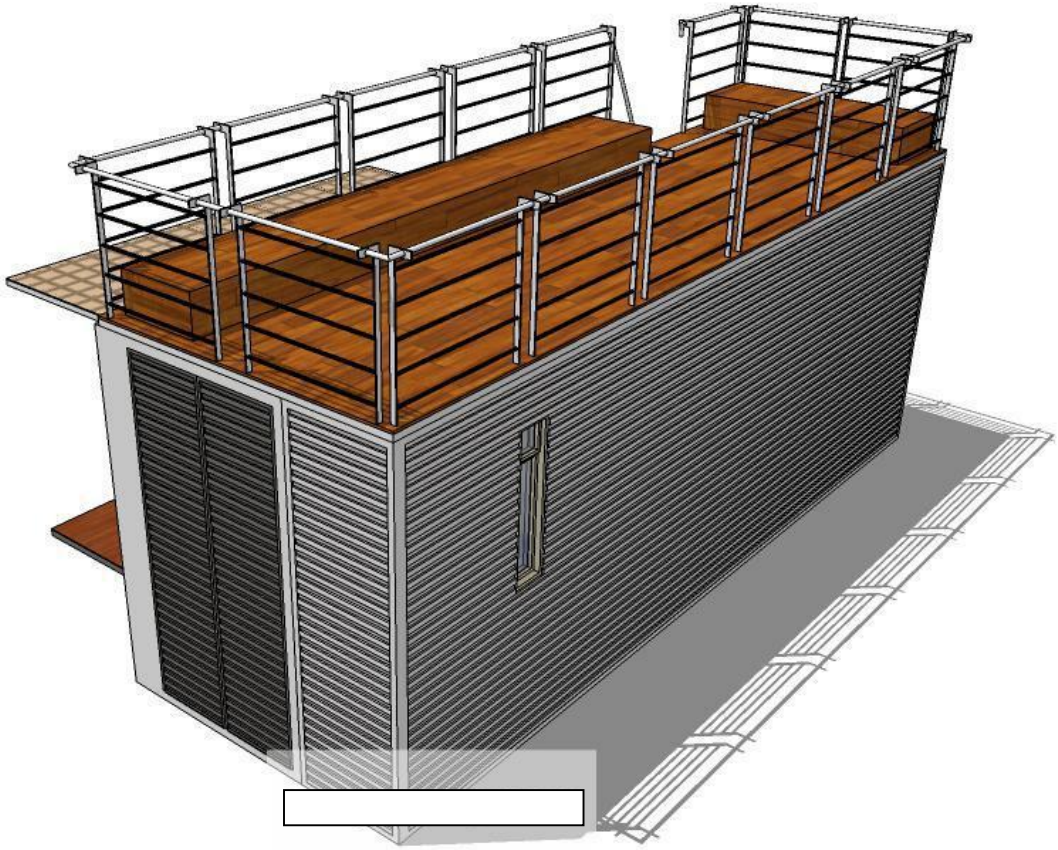

Container house specification

1.1 Floor Panel

- 18# Channel steel main beams (sandblasted)
- 14# Channel steel cross member (sandblasted)
- Painting
- 1 inch marine plywood floor board
- ½ inch composite floor covering. (bathroom floor covering would be ceramic tile)

1.2. Roof panel (3 inch)

-Top decking : water proof layer with outdoor composite wood floor.

- Galvanized 5mm steel plate
- ISO shipping container corners
- 3 inch EPS (Expanded Polystyrene) Foam for insulation
- Gypsum board for inner ceiling .

1.3. Wall and partition

- ¼ inch steel plate (same as shipping container)
- 2 inch EPS as insulation
- 1/3 inch gypsum board and plywood to cover the foam.
- Aluminum bent profiles to support the wall panels
- ICI paint.
- **Wall cladding : 2/3 inch Aluminum-zinc coated metal board with polyurethane foam cladding**

1.4. Door (6.5 ft inch x 10.5 ft)

- Aluminum door frame
- Safety lock.
- Double tempered glass

1.6. Electrical item

- distribution box with breakers
- Led lamps
- switches
- sockets
- Wiring system with PVC cable tubes / hidden installed inside of the wall panel

- Exhaust fan

1.7. Accessories

- Seal glue
- Screws and rivets
- Spare paint
- Packing material

III. PRICE

Steel container house price list					
NO.	Item	Details	Unite price (usd)	QTY	Total price (usd)
1	Container body	With doors, windows, top decking, balcony	58,995.00	1	58,995.00
2	Bath room	Shower room	1600.00	1	1,600.00
		Toilet	800.00	1	800.00
		Water basin with mirror	600.00	1	600.00
3	Kitchen	Cabinet only	2800.00	1	2,800.00
4	Bedroom	1 king size bed and 2 single bed .	3600.00	3	3,600.00
5	refrigerator	Media brand	1400.00	1	1,400.00
6.	Shipping	From factory to Address	1600.00	1	1,600.00
Total					72,995.00

5. Delivery time

60 days after received the 50% deposit payment, or according to the quantity.

6. Finish pictures for reference

Two single bed

Kitchen

Put down the dining table

Basin

Outside photo

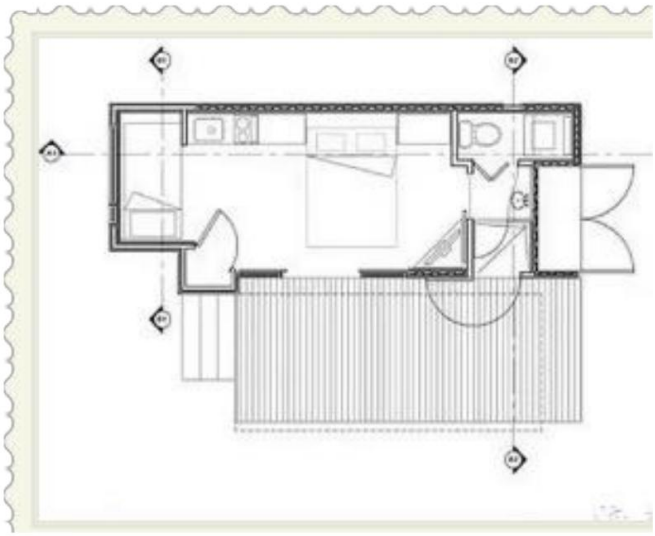

Thank you !